

ZIPPER TRACK ROLLER BLIND SERIES

4 ADVANTAGES



WINDPROOF 户外防风

Compared with ordinary roller blinds, the zipper track blind effectively combine the fabric and the guide rails through the anti-shedding structure on both sides, so that the product has a strong wind resistance effect.



SUNSHADING 防晒遮阳

Zipper track blind can not only reflect most of the ultraviolet rays of sunlight, but also adjust the sunlight that enter into the room. It can protect indoor household items from the sunlight. At the same time, It can make indoor temprature balance through heat insulation.



PERFECT ARCHITECTURAL MATCH 建筑完美搭配

The product is minimalist design, perfectly interpreting the modernist spirit of the building. Strong or contrasting colors are easy to cause a shock in the visual aspect, and enhance the aesthetic value and artistic appreciation of modern



HIGH WEATHER RESISTANCE 耐候性强

With the aluminum alloy accessories and special outdoor fabrics, it makes the blinds with super high weather resistance effect. The blind has the ability to resist wind,mosquitos and sand.




SIMPLE DESIGN



SMOOTH RUNNING

Extremely warm and durable inner rail

Special material guide rails are selected, which are not deformed at - 40 °C~120 °C, and can cope with harsh outdoor environments.

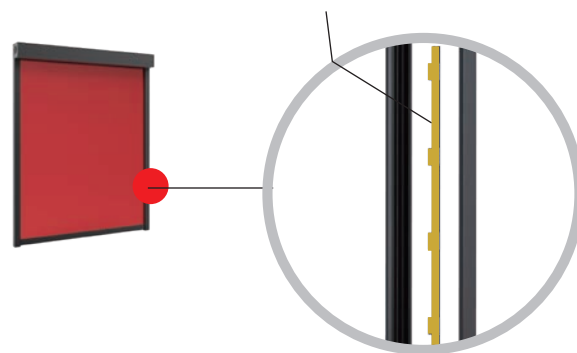

Special anti tripping design

Special structural design to prevent the fabric from falling off, allowing the fabric to pass smoothly without falling off or sticking due to excessive wind force or other reasons.



SPECIAL FABRIC

HIGH STRENGTH

FIRE RESISTANCE

HIGH WEATHER RESISTANCE

HIGH COLOR FASTNESS

HIGH STABILITY

CHMPION IN 6 EVENTS
— Outdoor Special Fabric —



SELF-CLEANING FUNCTION




SUPER WIND RESISTANCE

ZIPPER TRACK BLINDS CAPABLE OF RESISTING HURRICANES


The static test value is equivalent to 1.7 times the level 12 hurricane

1.7 times the level 12 hurricane

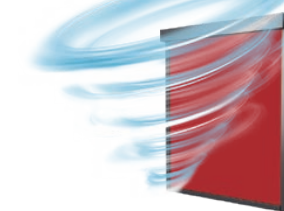

Outdoor special fabric zipper track blind > 1500Pa

12 hurricane




Category 12 hurricane ~ 850Pa

Wind resistance level: 10


Blackout zipper track blind > 1200Pa, equivalent to 1.4 times the magnitude 12 hurricane
Outdoor special fabric zipper track blind > 1500Pa, equivalent to 1.7 times the magnitude 12 hurricane

Wind scale					
Wind level	Name	Wind speed(M/S)	Wind speed (km/h)	Wind pressure (N/m²)	Land image
0	No wind	0.0-0.2	<1	0-0.025	The smoke goes up, it feels no wind
1	light air	0.3-1.5	1-5	0.056-0.14	The smoke indicates the wind direction, the wind vane does not turn
2	Light breeze	1.6-3.3	6-11	0.16-6.8	It feels windy, the leaves make a little noise a little noise
3	breeze	3.4-5.4	12-19	7.2-18.2	The leaves and branches sway, the flags unfold
4	Zephyr	5.5-7.9	20-28	18.9-39	Blow up dust, paper, dust, sand
5	Fresh breeze	8.0-10.7	29-38	40-71.6	Small tree swaying, pan wavelet on the lake surface, great resistance
6	Gale	10.8-13.8	39-49	72.9-119	The branches are shaking, the wires are audible, and it is difficult to lift the umbrella
7	blast	13.9-17.1	50-61	120.8-182.8	Difficulty walking, big trees shaking, balloons blowing up or bursting
8	strong wind	17.2-20.7	62-74	184.9-267.8	Breaking the branches, it feels a lot of resistance to move forward, the umbrella may fly away
9	strong gale	20.8-24.4	75-88	270.4-372.1	The roof is damaged, the tiles blow, and the branches break
10	fierce wind	24.5-28.4	89-102	375.2-504.1	Uproot trees and destroy houses
11	storm	28.5-32.6	103-117	507.7-664.2	Damage is widespread, houses are blown away, and "sandstorms" may occur
12	Hurricane	32.7-36.9	117-134	664.2-851	Very few on land, causing huge disasters and blowing away houses

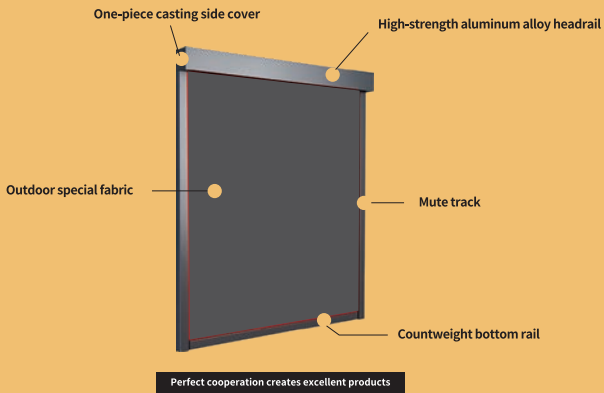

ZIPPER TRACK BLINDS CAPABLE OF RESISTING HURRICANES

The static test value is equivalent to 1.7 times the level 12 hurricane

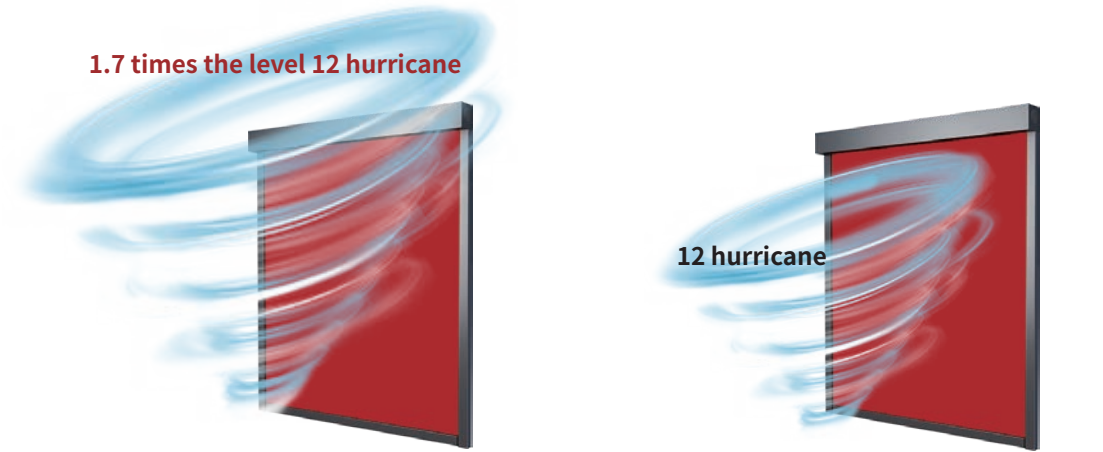


Outdoor special fabric zipper track blind > 1500Pa

Category 12 hurricane ≈ 850Pa


Blackout zipper track blind > 1200Pa, equivalent to 1.4 times the magnitude 12 hurricane
Outdoor special fabric zipper track blind > 1500Pa, equivalent to 1.7 times the magnitude 12 hurricane

Under the pressure of 1200Pa, the product has no plastic deformation and can be used normally

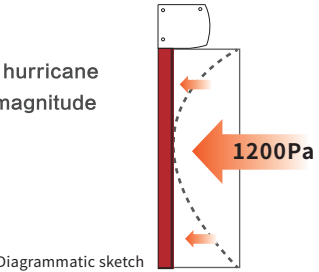

Wind proof performance certificate

Wind resistance level: 10

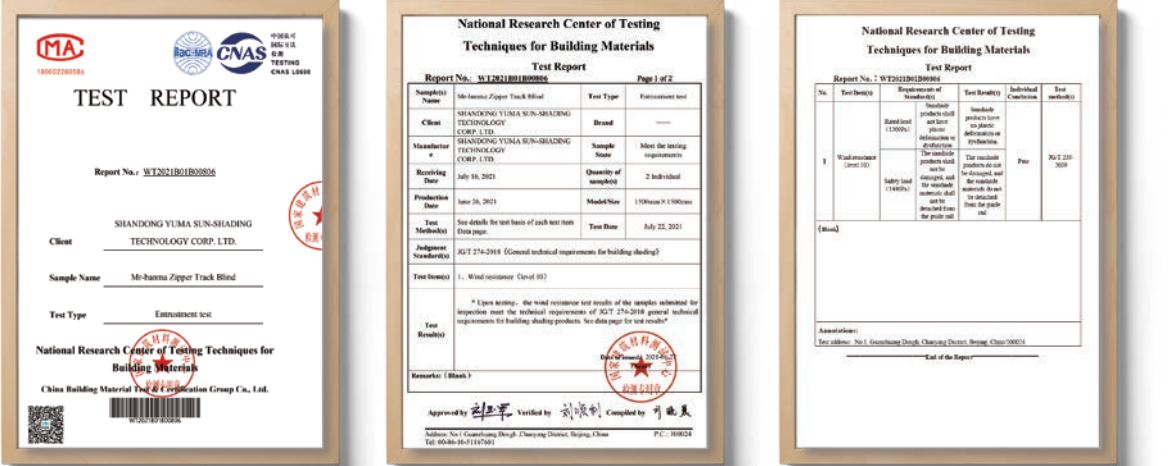


Applicable environment

Widely used in: villas, five-star hotels, modern home, car 4S shop, exhibition hall, outdoor courtyard and other places.





ZT06

EXTRA WIDE ZIPPER TRACK ROLLER BLIND

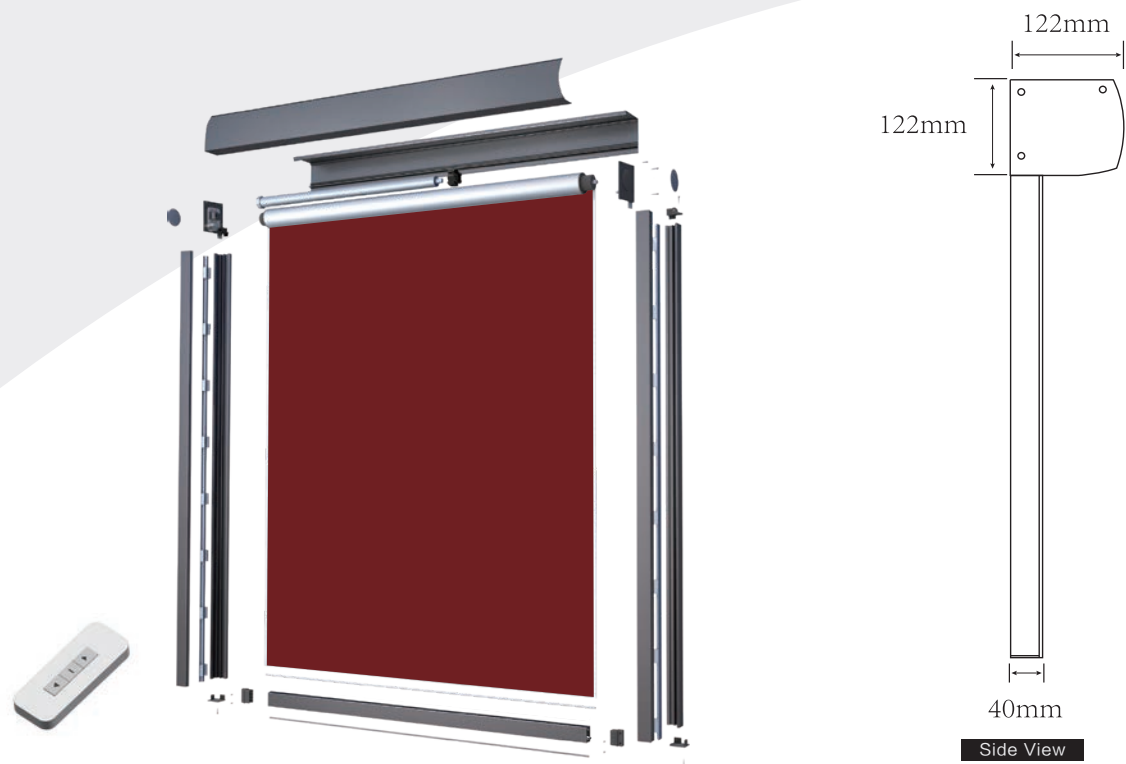


Basic parameters


Limit value	MAX: Width 600cm x Height 320cm MIN : Width 70 cm x Height 100cm
Color	White / Light gray / Dark grey / Brown / Black
Control	Remote control
Material	Aluminum alloy profile + nylon accessories
Windproof grade	Level 10 (static wind pressure value>1200Pa) Category 12 hurricane ~ 850Pa

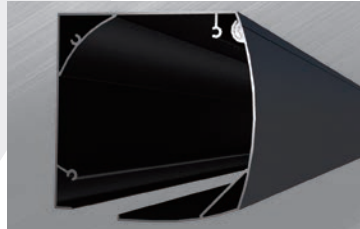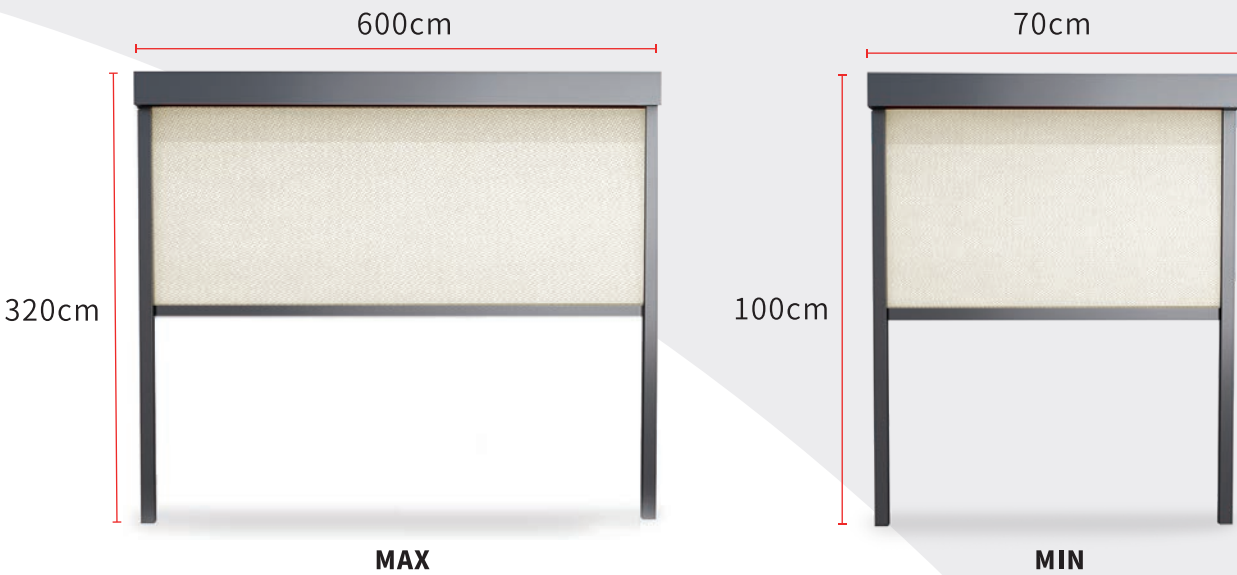

High strength aluminum alloy cassette with electrostatic outdoor powder coating.

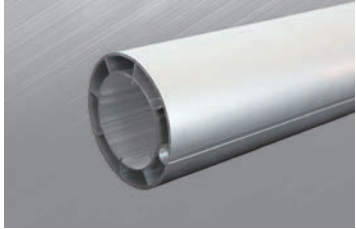

High strength aluminum alloy double-layer aluminum tube.

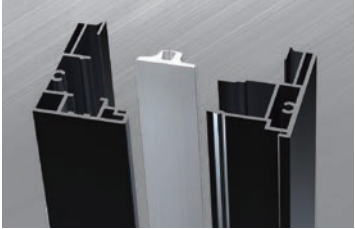

Polymer wear-resistant material is stuck with the guide track, makes the fabric firmly installed.




Strong and firm bottom rail with anti-collision rubber strip installed.

Motor Description

Different widths,different motor specifications


Blind Width				
0.7m	2m	3m	4m	6m
20N			40N	

Installation top view

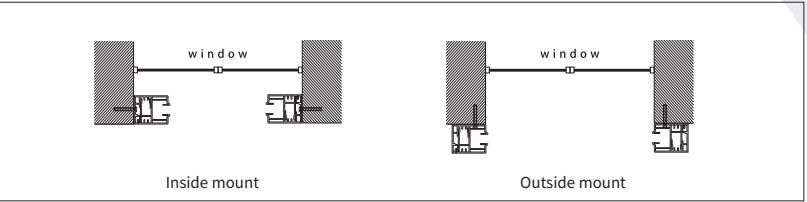


ZT08

BASIC ZIPPER TRACK ROLLER BLIND

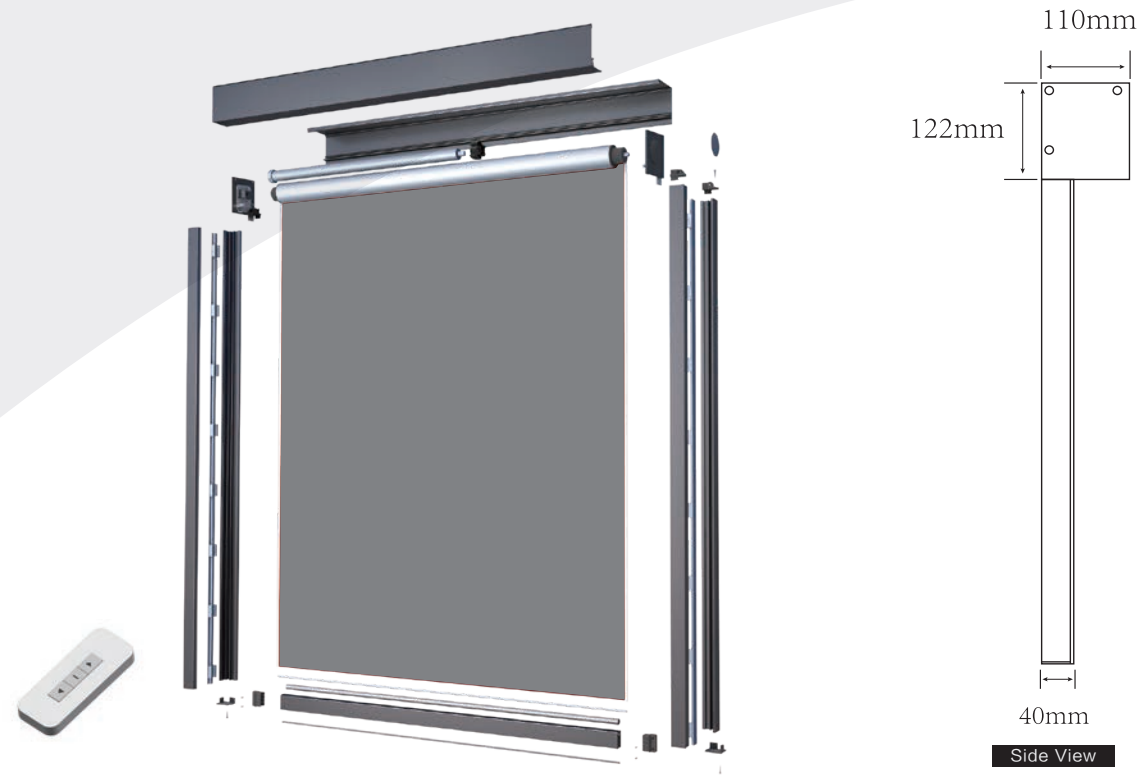

Basic parameters


Limit value	MAX: Width 400cm x Height 320cm MIN : Width 70 cm x Height 100cm
Color	White / Light gray / Dark grey / Brown / Black
Control	Remote control
Material	Aluminum alloy profile + nylon accessories
Windproof grade	Level 10 (static wind pressure value>1200Pa) Category 12 hurricane ~ 850Pa

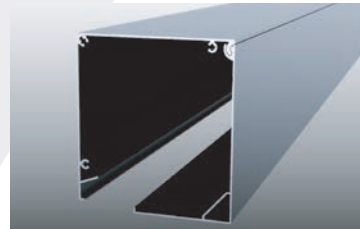


High strength aluminum alloy cassette with electrostatic outdoor powder coating.



High strength aluminum tube.

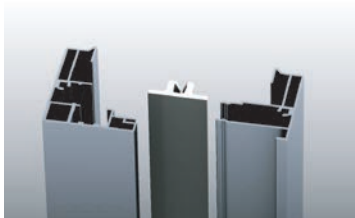

Polymer wear-resistant material is stuck with the guide track, makes the fabric firmly installed.

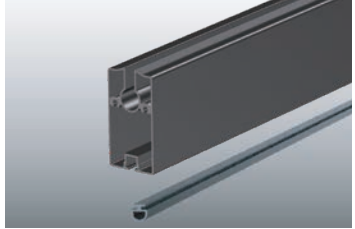


Strong and firm bottom rail with anti-collision rubber strip installed.

Motor Description

Different widths, different motor specifications


Blind Width				
0.7m	2m	3m	4m	6m
20N			40N	

Installation top view

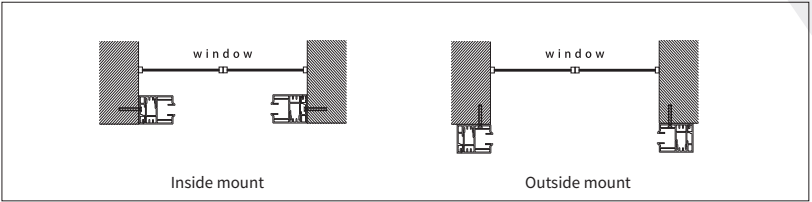

ZT09

PROJECT ZIPPER TRACK ROLLER BLIND

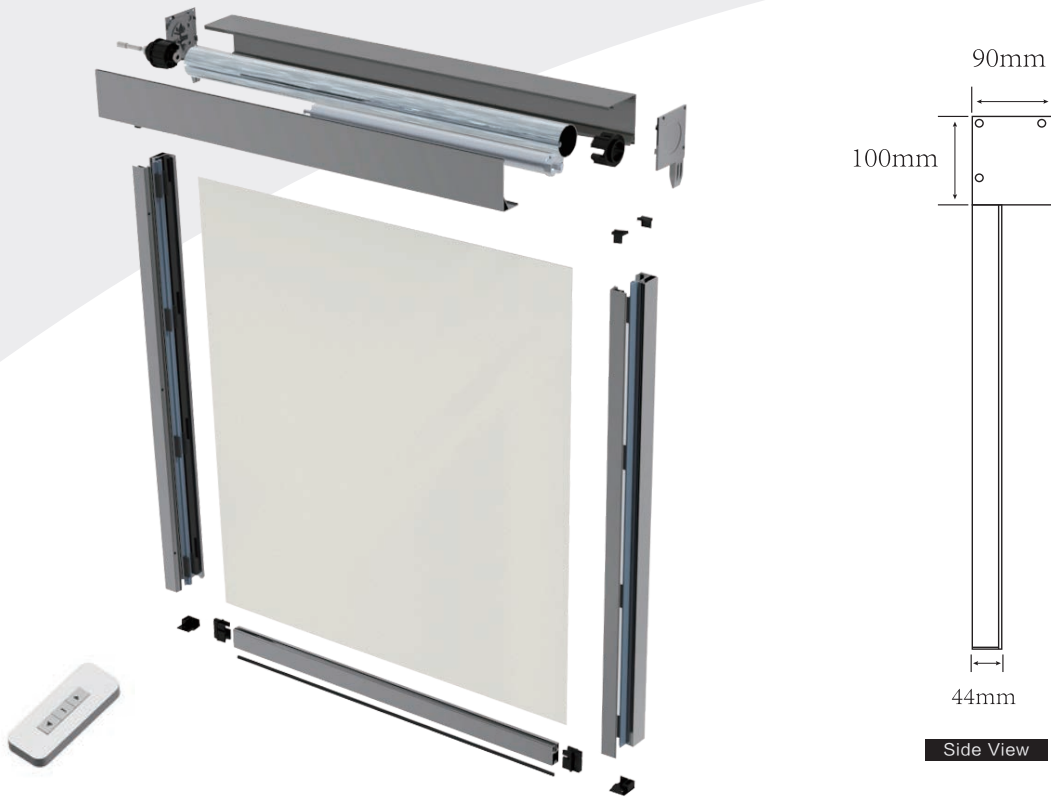

Basic parameters

Limit value	MAX: Width 350cm x Height 320cm MIN : Width 70 cm x Height 100cm
Color	White / Light gray / Dark grey / Brown / Black
Control	Remote control
Material	Aluminum alloy profile + nylon accessories
Windproof grade	Level 10 (static wind pressure value>1200Pa) Category 12 hurricane ~ 850Pa





Motor Description


Different widths,different motor specifications

Blind Width				
0.7m	2m	3m	4m	6m
20N			40N	


Installation top view

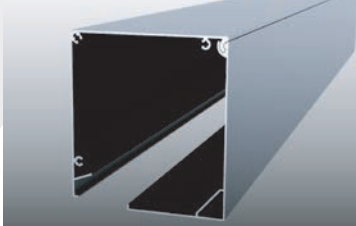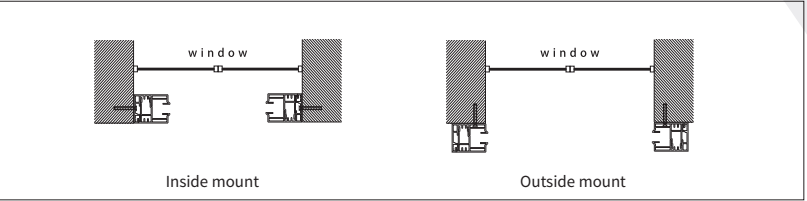


High strength aluminum alloy cassette with electrostatic outdoor powder coating.

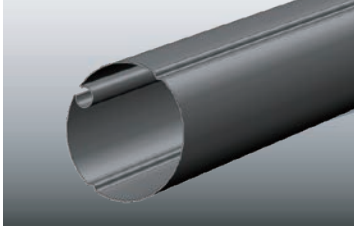

High strength aluminum tube.

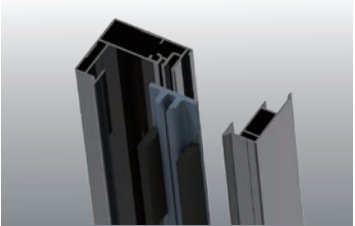



Polymer wear-resistant material is stuck with the guide track, making the fabric firmly installed.

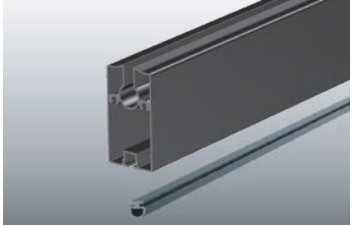

Strong and firm bottom rail with anti-collision rubber strip installed.


ZT10

MANUAL ZIPPER TRACK ROLLER BLIND

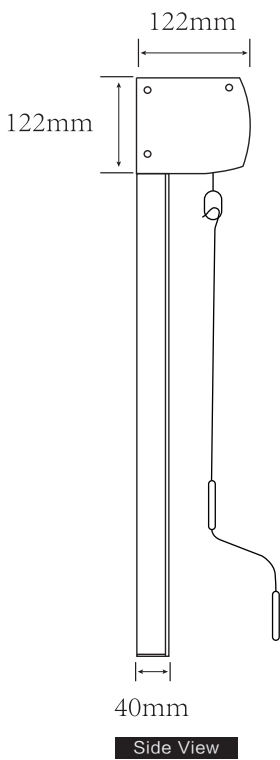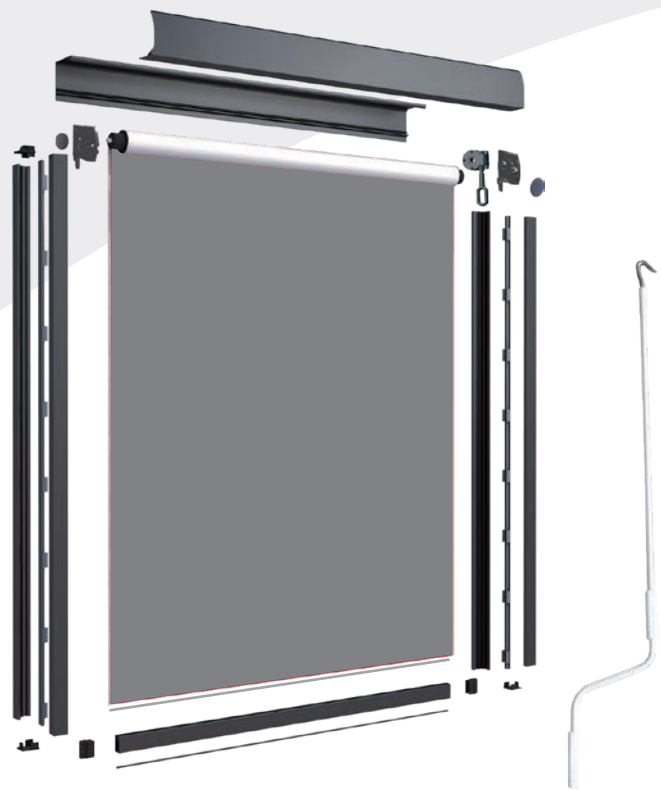

Basic parameters

Limit value	MAX: Width 600cm x Height 320cm MIN : Width 70 cm x Height 100cm
Color	White / Light gray / Dark grey / Brown / Black
Control	Crank
Material	Aluminum alloy profile + nylon accessories
Windproof grade	Level 10 (static wind pressure value>1200Pa) Category 12 hurricane ~ 850Pa

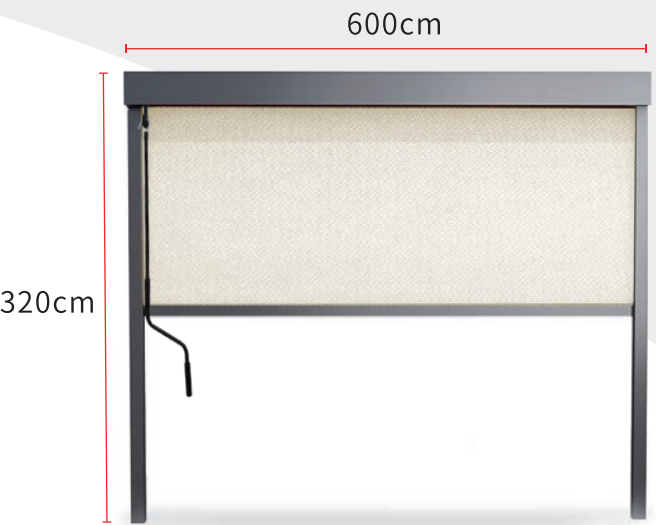

MAX




MIN

Crank description

Different heights of the blinds with different specifications of crank.

Height	1-2.2m	1.5m
	2.2-3.2m	2m


Installation top view

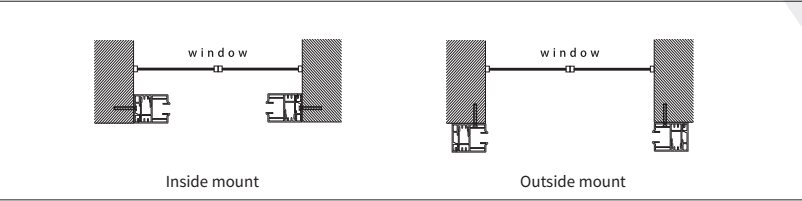


Manual system, adjustable lifting, labor-saving and convenient.



Copper gears, high driving precision and high driving efficiency .

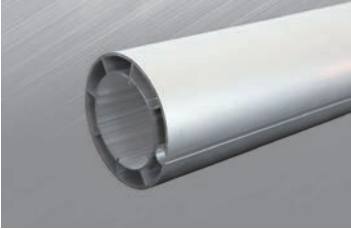

Double layer high strength aluminum alloy tube.

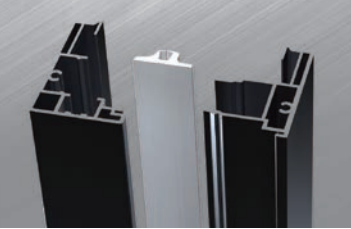

Polymer wear-risitanct material is stuck with the guide track,makes the fabric firmly installed.



ZT11

DOUBLE LAYER ZIPPER TRACK ROLLER BLIND




Basic parameters


Limit value	MAX: Width 350cm x Height 320cm MIN : Width 70 cm x Height 100cm
Color	White / Light gray / Dark grey / Brown / Black
Control	Remote control
Material	Aluminum alloy profile + nylon accessories
Windproof grade	Level 10 (static wind pressure value>1200Pa) Category 12 hurricane ~ 850Pa

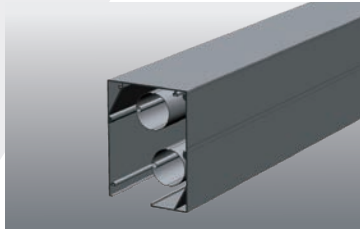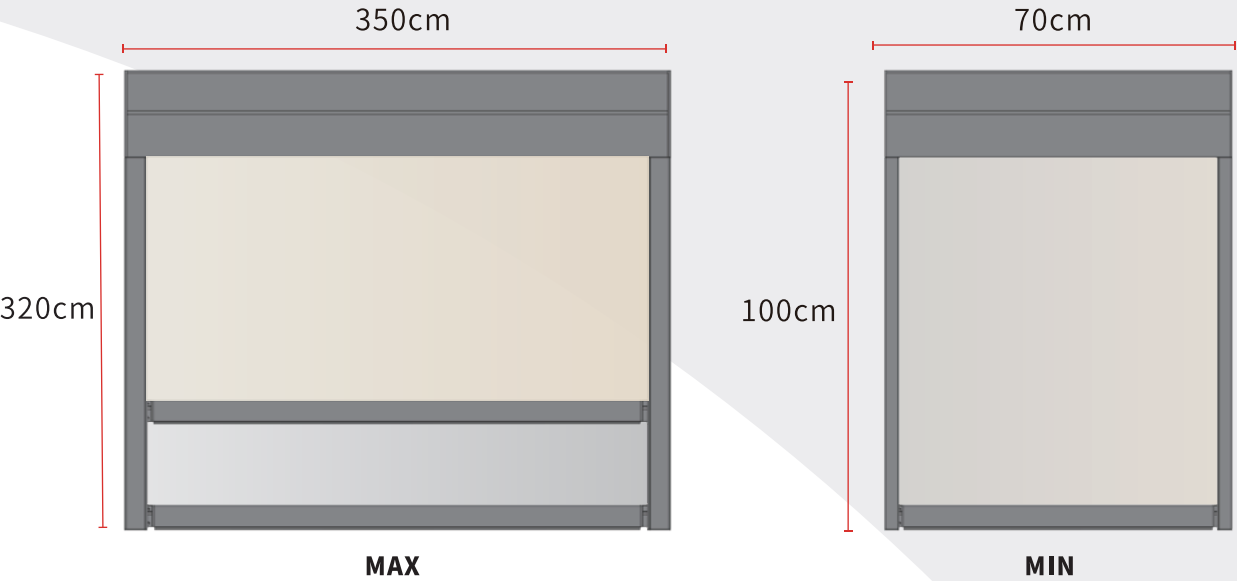


High strength aluminum alloy cassette with electrostatic outdoor powder coating.

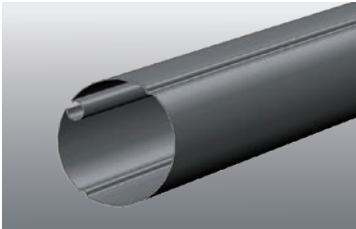

High strength aluminum tube.

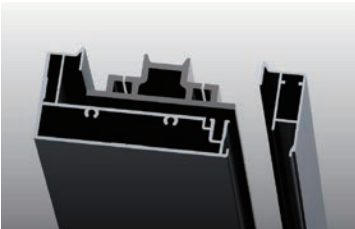

Polymer wear-resistant material is stuck with the guide track, making the fabric firmly installed.

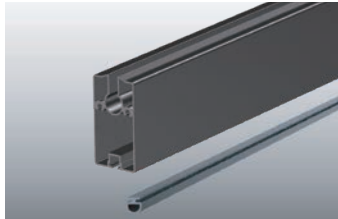


Strong and firm bottom rail with anti-collision rubber strip installed.

Motor Description

Different widths, different motor specifications

Blind Width				
0.7m	2m	3m	4m	6m
20N			40N	

Installation top view

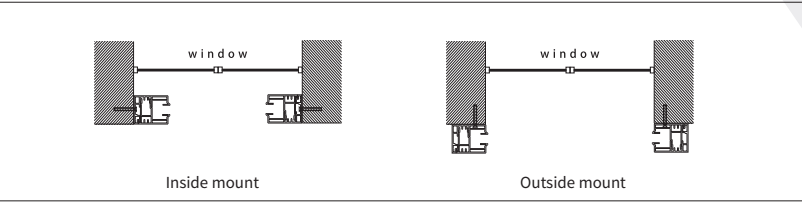


ZT05

STEEL-WIRE GUILDING BLIND



Basic parameters

Limit value	MAX: Width 500cm x Height 320cm MIN : Width 70 cm x Height 100cm
Color	White / Light gray / Dark grey / Brown / Black
Control	Remote control
Material	Aluminum alloy profile + nylon accessories
Windproof grade	/

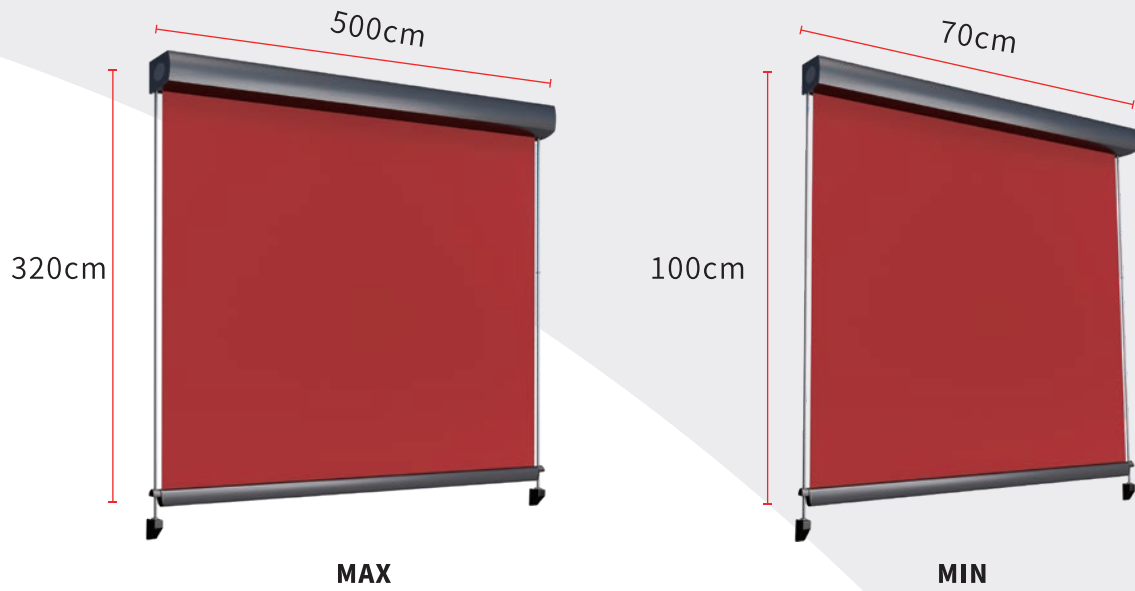


Motor Description

Different widths,different motor specifications

Blind Width				
0.7m	2m	3m	4m	5m
20N			40N	

Installation top view

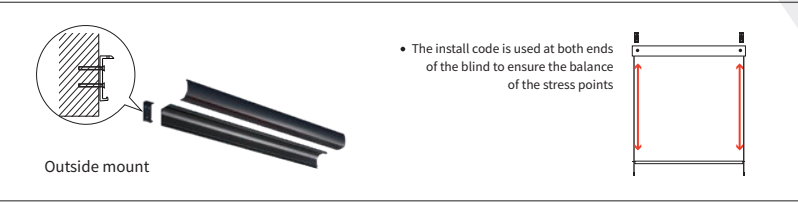



Aluminum color

Standard color card




Custom RAL international colors, customizable colors



Fabric Selection

VP


Outdoor special fabric series (openness factor 6%)

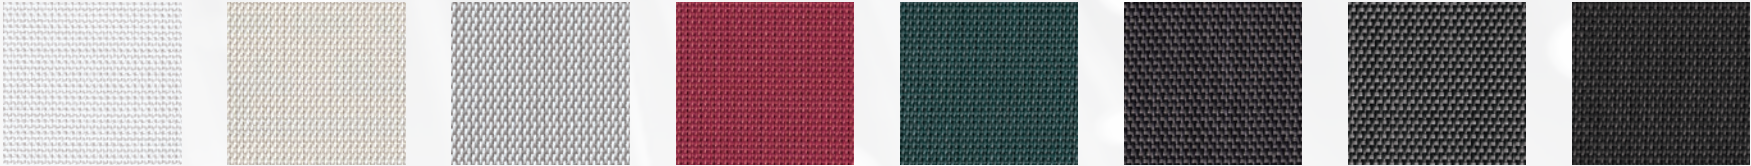

VP-1 VP-2 VP-3 VP-4 VP-5 VP-6 VP-7 VP-8

VP-15


Outdoor special fabric series (openness factor 15%)

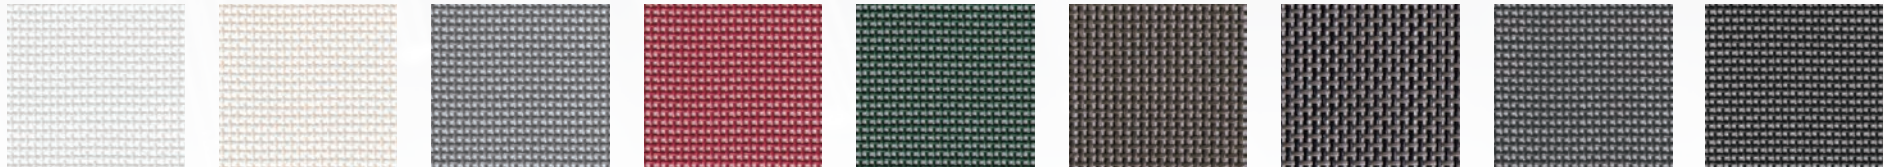

VP-1501 VP-1502 VP-1503 VP-1504 VP-1505 VP-1506 VP-1507 VP-1508 VP-1509

VP-25

Outdoor special fabric series (openness factor 25%)

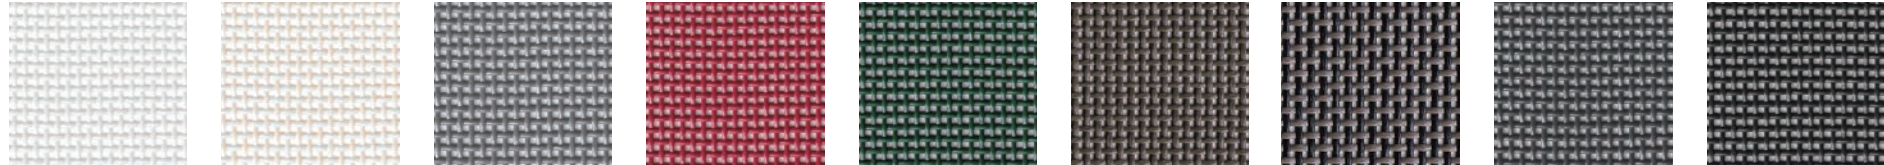


VP-2501 VP-2502 VP-2503 VP-2504 VP-2505 VP-2506 VP-2507 VP-2508 VP-2509

Fabric Selection

Model Y


All weather sunshade series (openness factor 4%)

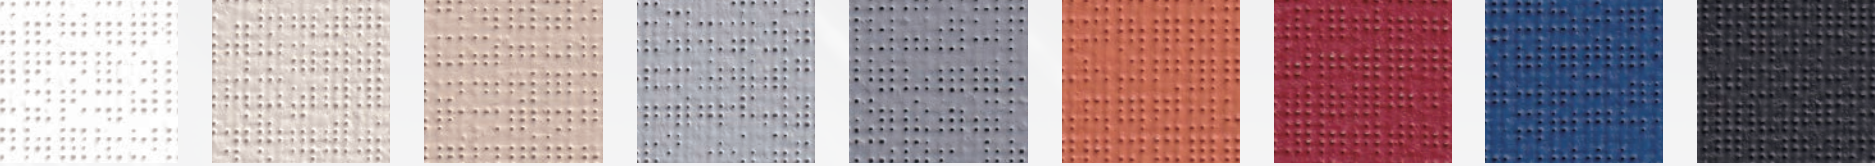

MY-401 MY-402 MY-403 MY-404 MY-405 MY-406 MY-407 MY-408 MY-409

Model 3


All weather sunshade series (openness factor 14%)

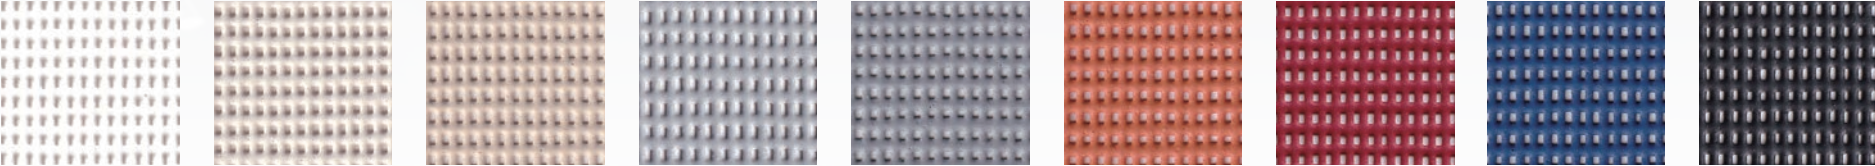

M3-1401 M3-1402 M3-1403 M3-1404 M3-1405 M3-1406 M3-1407 M3-1408 M3-1409

MV

Fiberglass series(fiberglass material blackout)

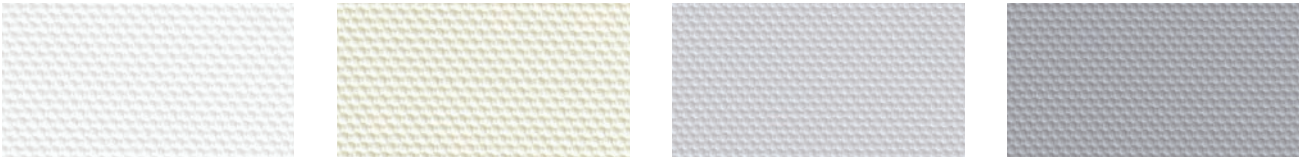


MV-35 MV-36 MV-37 MV-37

Fabric Selection

U2


Sunscreen Fabric series (openness factor 9%)

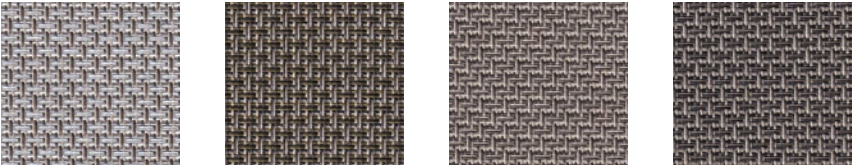

U2-901 U2-902 U2-903 U2-904

MC


Classic Sunscreen Fabric series (openness factor 5%)

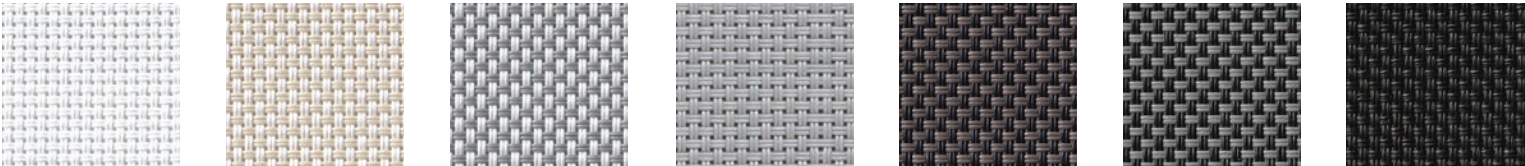

MC-01 MC-02 MC-03 MC-05 MC-07 MC-08 MC-09

A2

Classic Sunscreen Fabric series (openness factor 0% / 1% / 3%)

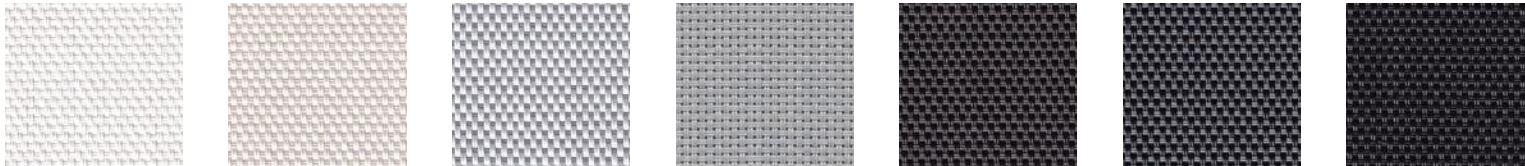



A2-101
A2-301 A2-102
A2-301 A2-003
A2-103
A2-301 A2-006
A2-306 A2-008
A2-108
A2-301 A2-010
A2-110
A2-301 A2-011
A2-111
A2-301

Product	Composition	Weight	Thickness	Yarn count	Openness factor
OUTDOOR DEDICATED SERIES					
VP	38%Fiberglass + 62%PVC	495g/m ² ±5%	0.62mm±5%	40 * 24	6%
VP-15	25%Polyester + 75%PVC	436g/m ² ±5%	0.71mm±5%	23 *23	15%
VP-25	25%Polyester + 75%PVC	360g/m ² ±5%	0.62mm±5%	19 * 19	25%
ALL WEATHER SUNSHADE SERIES					
Model Y	/	440g/m ² ±5%	0.45mm±5%	/	4%
Model 3	/	390g/m ² ±5%	0.50mm±5%	/	14%
FIBERGLASS SERIES					
MV	40%Fiberglass + 60%PVC	480g/m ² ±5%	0.38mm±5%	/	Blackout
CLASSIC SUNSCREEN FABRIC SERIES					
U2	30%Polyester + 70%PVC	425g/m ² ±5%	0.75mm±5%	48 * 46	9%
A2	30%Polyester + 70%PVC	658g/m ² ±5%	0.83mm±5%	60 * 42	0%
A2	30%Polyester + 70%PVC	428g/m ² ±5%	0.73mm±5%	48 * 46	1%
A2	30%Polyester + 70%PVC	440g/m ² ±5%	0.65mm±5%	54 * 44	3%
MC	30%Polyester + 70%PVC	520g/m ² ±5%	0.75mm±5%	36 * 36	5%

Different openness factors

(inside → outside)

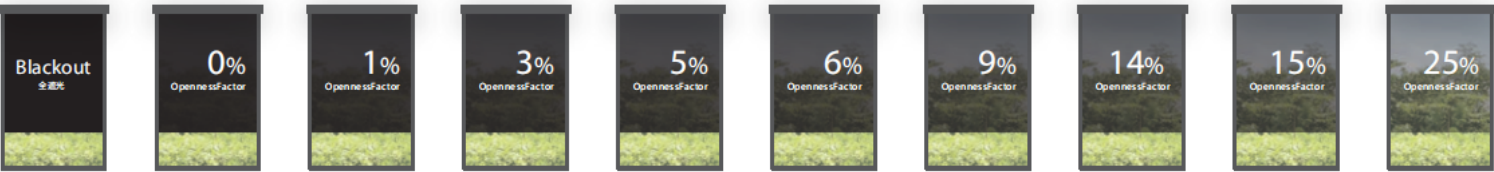

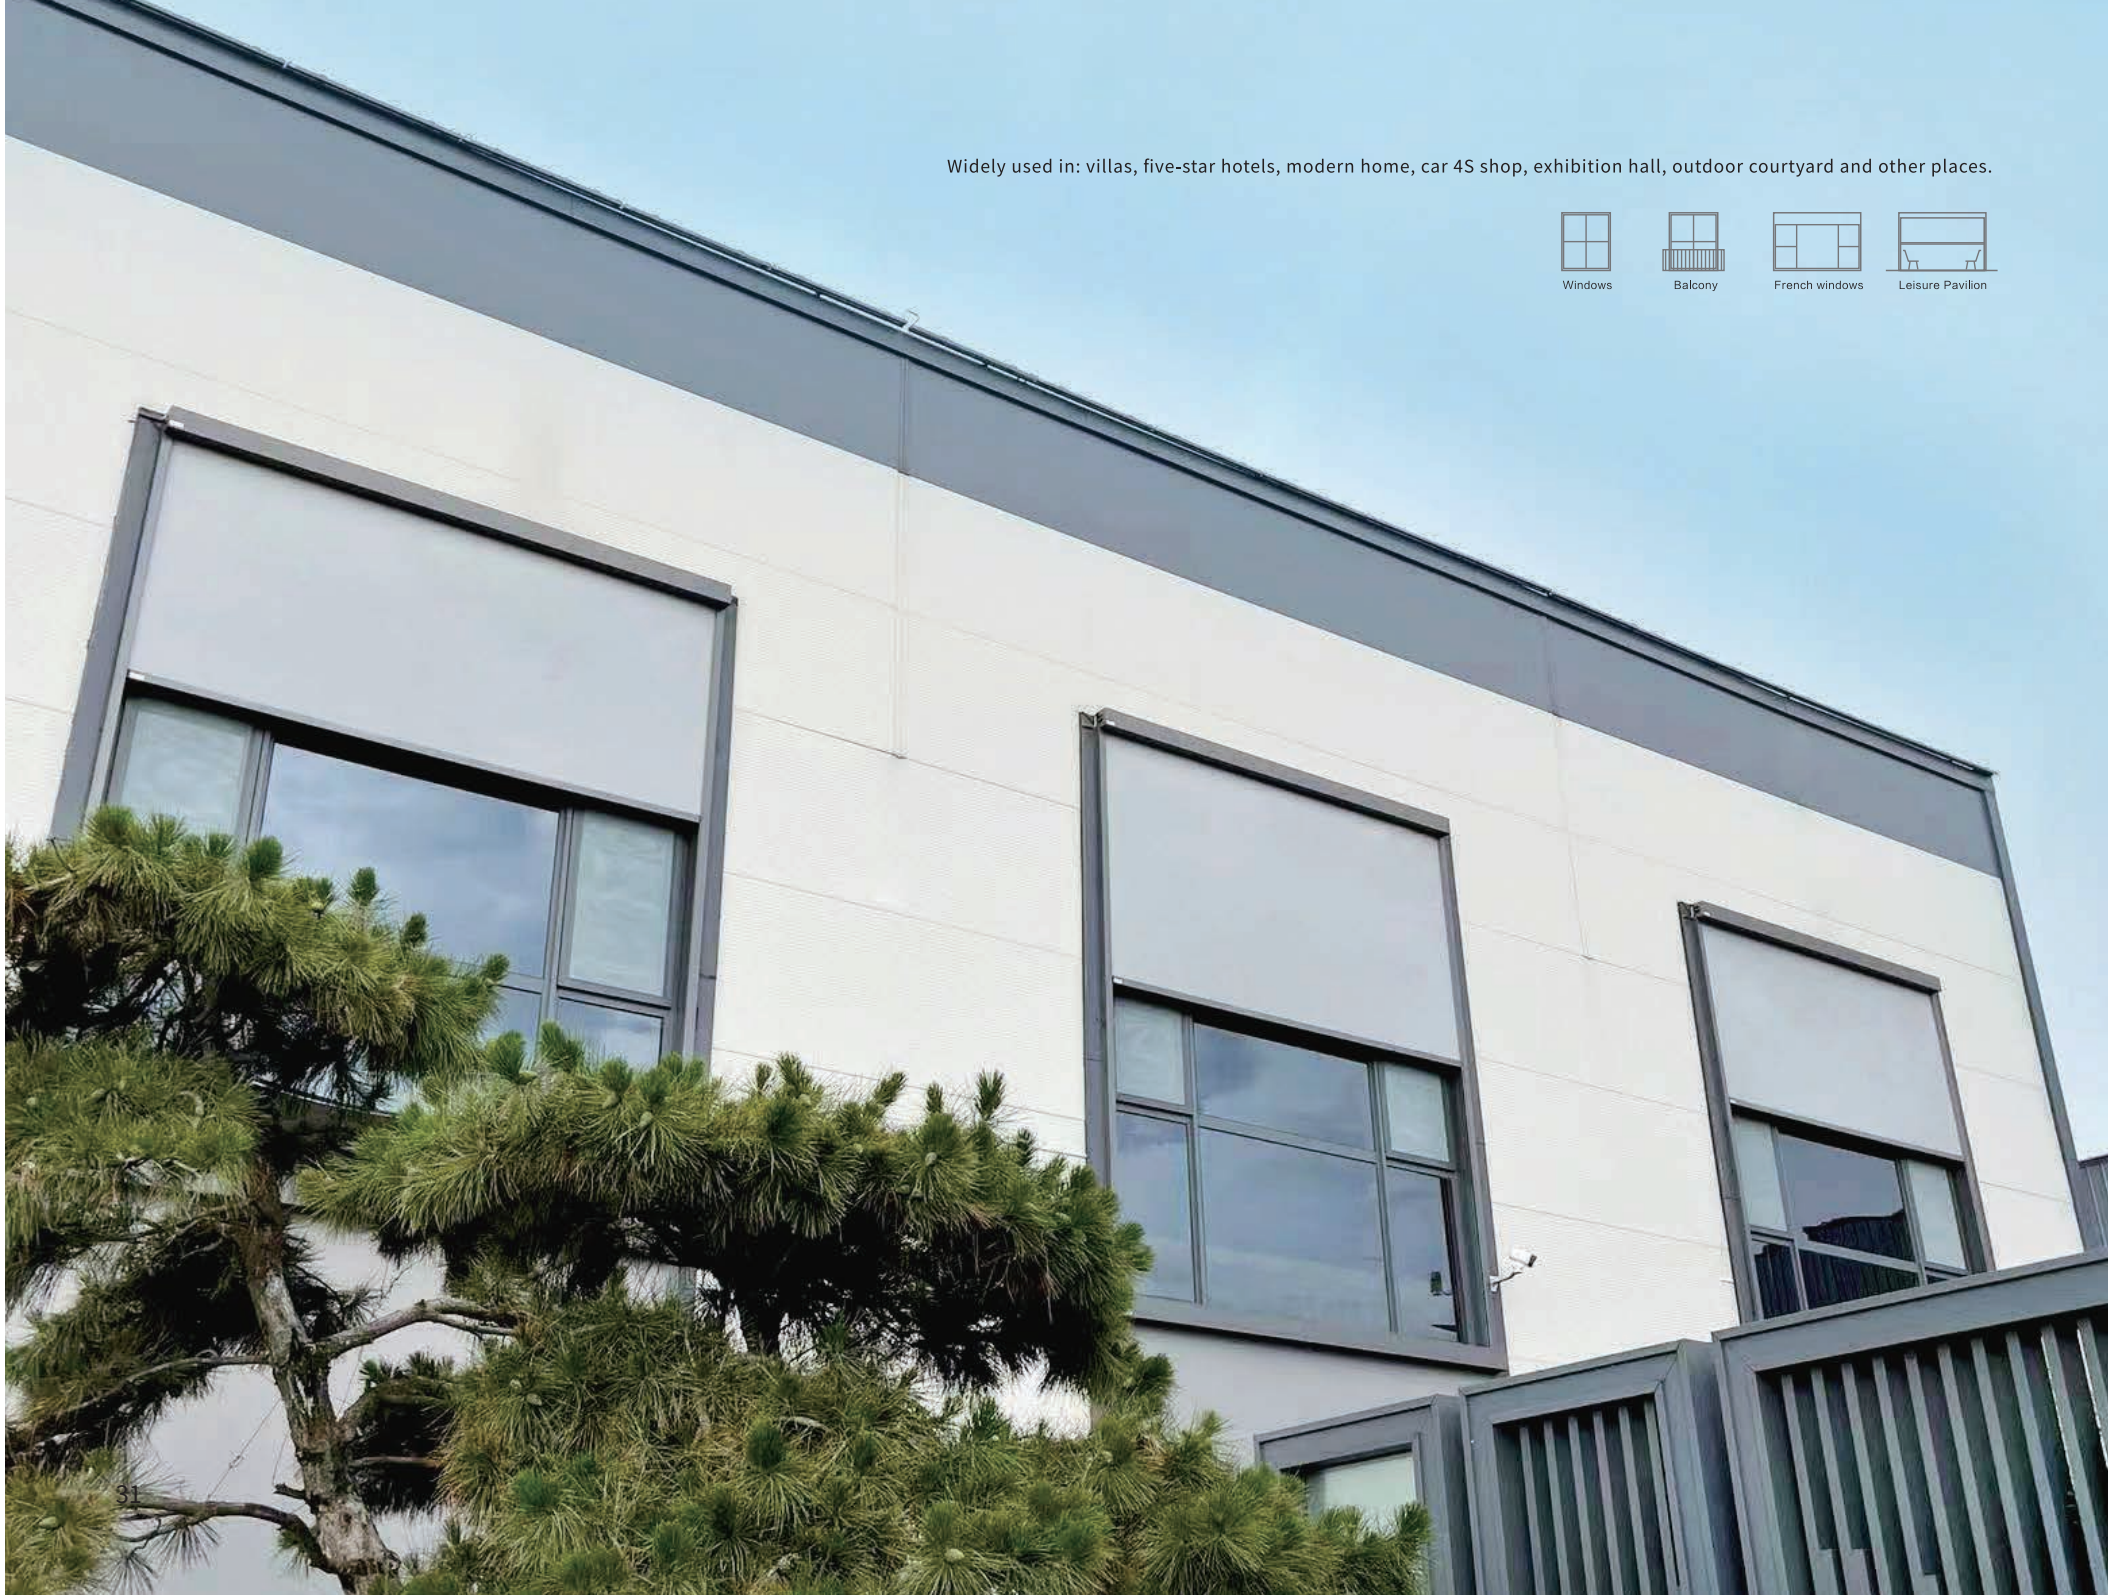

Widely used in: villas, five-star hotels, modern home, car 4S shop, exhibition hall, outdoor courtyard and other places.



Windows



Balcony



French windows



Leisure Pavilion

